



NABO

NABO is a family of the Forma which is have more combination , in different power output, one head, double head and triple head. Granting a complete rotation and creating accent or wide lighting.



WIDELY ROTATION
355°turning range , 180°swiver range





GOOD LIGHT OUTPUT
Excellent and lower UGR , clear light shadow




RA
High CRI up to 97



MULTI COMBINATION
More than 8 different size combination, one head, double head 7W, 15W, 25W, 35W




Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.34kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	7W*1	80LM/W	Φ65mm	□72*71*H110mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	7W*2	80LM/W	□65*120mm	Φ71*131*H110mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.89kg
Test seal	      

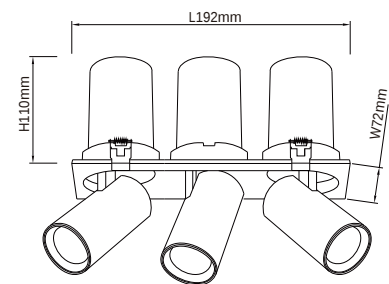



 Cut out
 □ 65*182mm


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	7W*3	80LM/W	□ 65*182mm	Φ72*192*H110mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.54kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	15W*1	80LM/W	□90mm	□100*100*H120mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	15W*2	80LM/W	□90*175mm	□100*185*H120mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.2kg
Test seal	      

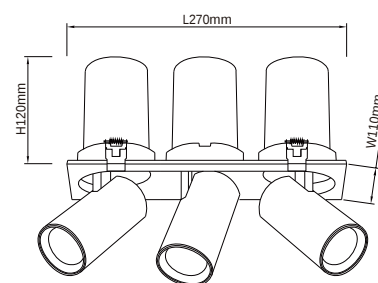


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	15W*3	80LM/W	□90*260mm	□100*270*H120mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.47kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	25W*1	80LM/W	□ 120mm	□ 130*130*H135mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.9kg
Test seal	      

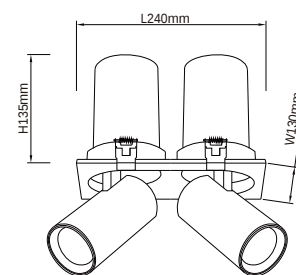


Cut out
□ 120*230mm


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	25W*2	80LM/W	□ 120*230mm	□ 130*240*H135mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90




36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000 K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.6kg
Test seal	      

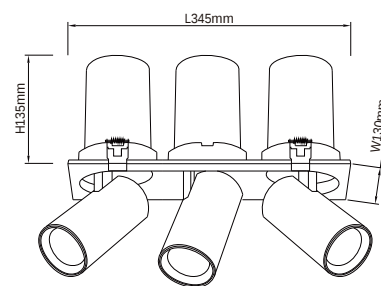


Cut out
□ 120*335mm


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	25W*3	80LM/W	□ 120*335mm	□ 130*345*H135mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.1kg
Test seal	      



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	35W*1	80LM/W	Φ140mm	□160*H155mm	15°/24°/38°	90	ON/OFF DIM/DALI

15°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	NABO
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.5kg
Test seal	      

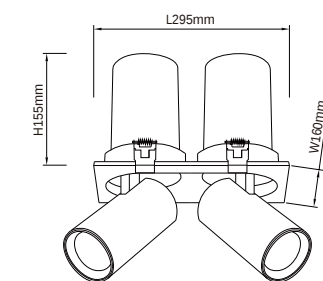


Cut out
□140*280mm

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG721	35W*2	80LM/W	□140*280mm	□160*295*H155mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB