


RECESSED SPOT LIGHT

GAMMA


Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.16kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

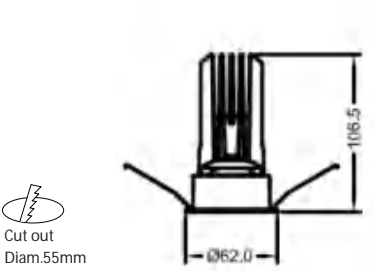


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	7W/9W/12W	60LM/W	55mm	62*H106.5mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT

GAMMA


Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.16kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

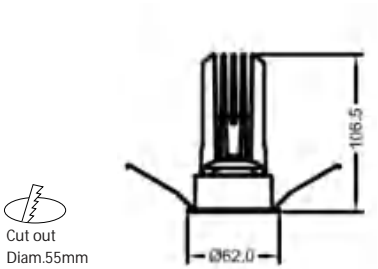


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	7W/9W/12W	60LM/W	55mm	62*H106.5mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Acessories






SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT


GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.16kg
Test seal	<div><div>EAC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

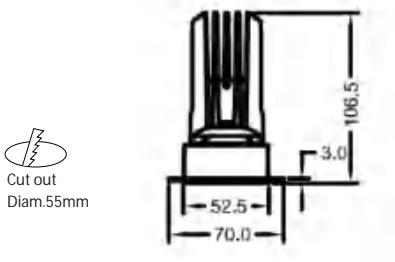

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	7W/9W/12W	75LM/W	55mm	70*H106.5mm	15°/24°/36°	90	ON/OFF DIM/DALI/0-10V
15°-3000K-CRI90		24°-3000K-CRI90		36°-3000K-CRI90			



Acessories



SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT




GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.35kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	10W/12W/15W	75LM/W	75mm	84*H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V
15°-3000K-CRI90		24°-3000K-CRI90		36°-3000K-CRI90			



Acessories



SOLITE
SOFTENING
LENS




HONEY
COMB

GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.26kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>





Cut out
Diam.75mm



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	10W/12W/15W	75LM/W	75mm	98*H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Acessories



SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT

GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.21kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div></div>

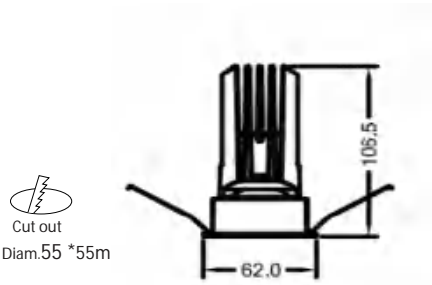




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	7W/9W/12W	75LM/W	55 *55mm	62*H106.5mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90



Acessories



SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT




GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.16kg
Test seal	<div><div>ENEC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>

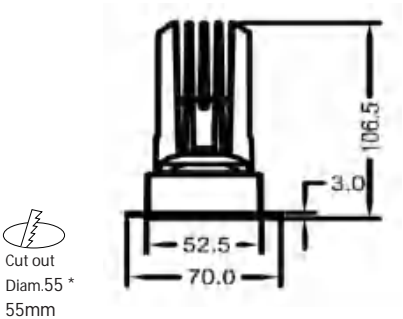

Code composition/ Composizione del codice


Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	7W/9W/12W	60LM/W	55 *55mm	70*H106.5mm	15°/24°/36° /55°	90	ON/OFF DIM/DALI/0-10V
15°-3000K-CRI90		24°-3000K-CRI90		36°-3000K-CRI90			



Acessories



SOLITE
SOFTENING
LENS





HONEY
COMB

RECESSED SPOT LIGHT




GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.21kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>

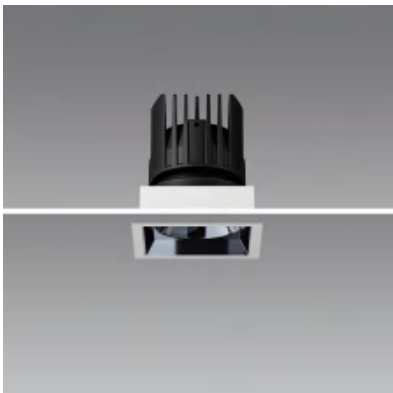

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	15W	75LM/W	75*75mm	82*H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V
15°-3000K-CRI90			24°-3000K-CRI90			36°-3000K-CRI90	



Acessories



SOLITE
SOFTENING
LENS





HONEY
COMB

RECESSED SPOT LIGHT




GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.21kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>

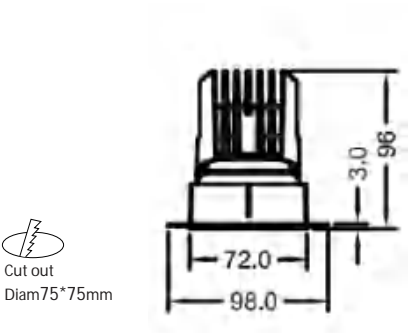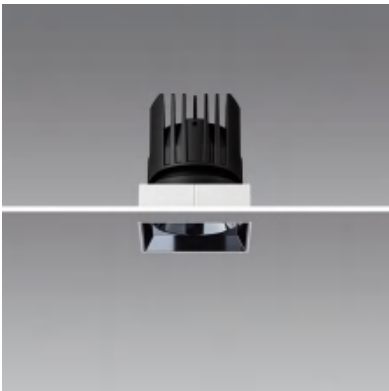

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	15W	75LM/W	75*75mm	98 * H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V
15°-3000K-CRI90		24°-3000K-CRI90		36°-3000K-CRI90			



Acessories





SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.35kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div></div></div>

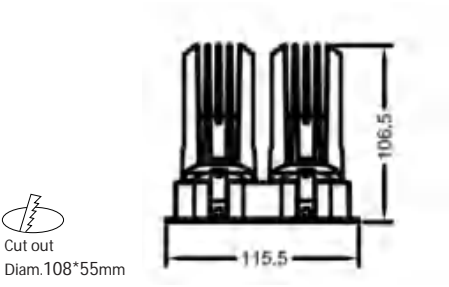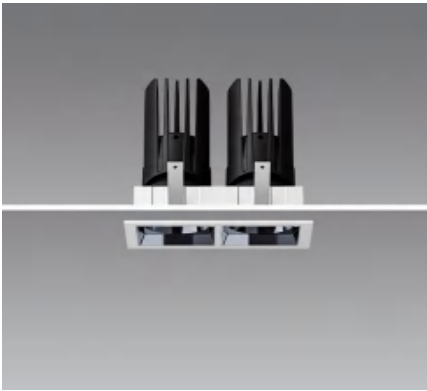


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	2*12W	75LM/W	108*55mm	115.5*H106.5mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Acessories



SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT

GAMMA


Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.32kg
Test seal	<div><div>ERC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	2*12W	75LM/W	108*55mm	104.5*H106.5mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS




HONEY
COMB

RECESSED SPOT LIGHT

GAMMA

Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.32kg
Test seal	

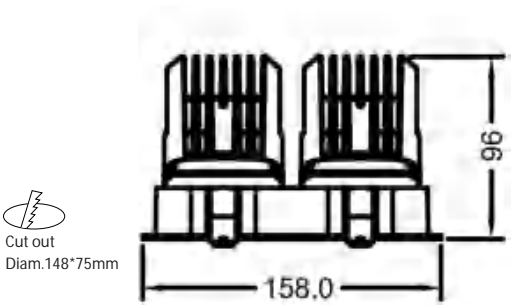




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	2*15W	75LM/W	148*75mm	158*H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90






Acessories





SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	UNO
Application areas	Accent lighting
Pan/tilt range	Tilt
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.32kg
Test seal	<div><div>EAC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

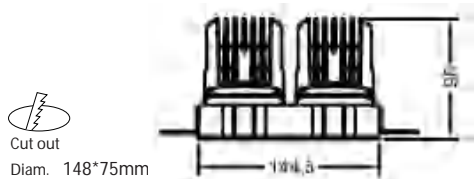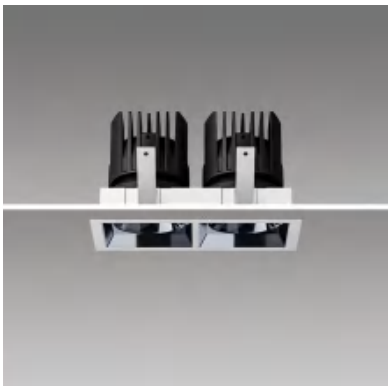

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	FUNTION
GMC225	2*15W	75LM/W	148*75mm	144.5* H96mm	15°/24°/36°/55°	90	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90



Acessories



SOLITE
SOFTENING
LENS



HONEY
COMB