



DUBEE

Designed for fashion boutiques and retail stores, 20W only 75mm cutoff size , these spotlights feature ultra-low UGR (<14) to eliminate glare, enhancing product visibility and customer comfort. High-CRI LEDs (>95) ensure true-to-life color rendering, critical for textiles and displays, focus allow precise highlighting of merchandise. Slim, minimalist housings blend into ceilings, maintaining clean aesthetics. Energy-efficient (120lm/W) with durable aluminum construction, they support long-term use. CE/RoHS-certified and compatible with dimming systems, they create inviting, artifact-free environments that elevate shopping experiences.



WIDELY ROTATION
355°turning range , 180°swiver range



FLEXIBLE INSTALLATION
with 5 different size of the cutting hole, 65mm, 75mm, 90mm, 120mm ,140mm




RA
High CRI up to 97



FLEXIBLE INSTALLATION
with 2 different size of the cutting hole 75mm, 95mm.




FOOD










FASHION




SHOP



AUTOMOBILE


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.39KG
Test seal	      



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	15W	100LM/LM	Ø75mm	Ø90*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90




Accessories



SOLITE
SOFTENING
LENS


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.39KG
Test seal	<div> <div>ERE</div> <div>CE</div> <div>IP20</div> <div></div> <div></div> <div>RoHS</div> <div>TM-21 100,000</div> </div>



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	20W	100LM/LM	Ø75mm	Ø90*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE








36°-3000K-CRI90




Accessories



SOLITE
SOFTENING
LENS


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.45KG
Test seal	      



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	Function
GMD519	24W	100LM/LM	Ø95mm	Ø115*125mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS

RECESSED OCULAR SPOT LIGHT

GAMMA


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.39KG
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

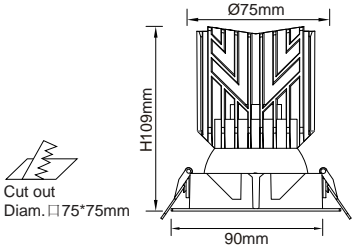

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	15W	100LM/LM	□ 75*75mm	□ 90*90*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90




Accessories



SOLITE
SOFTENING
LENS


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.42KG
Test seal	<div> <div>ERE</div> <div>CE</div> <div>IP20</div> <div></div> <div></div> <div>RoHS</div> <div>TM-21 100,000</div> </div>

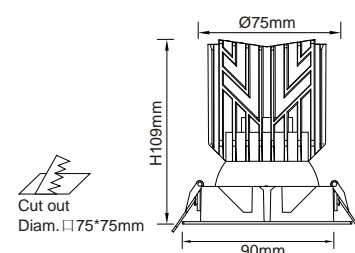

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	20W	100LM/LM	□ 75*75mm	□ 90*90*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90



Accessories




SOLITE
SOFTENING
LENS

RECESSED OCULAR SPOT LIGHT

GAMMA


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.42KG
Test seal	<div> <div>ERL</div> <div>CE</div> <div>IP20</div> <div></div> <div></div> <div>RoHS</div> <div>TM-21 100,000</div> </div>

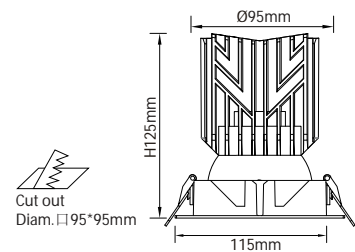

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	24W	100LM/LM	□ 95*95mm	□ 115*115*125mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE



36°-3000K-CRI90




Accessories



**SOLITE
SOFTENING
LENS**


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.7KG
Test seal	      

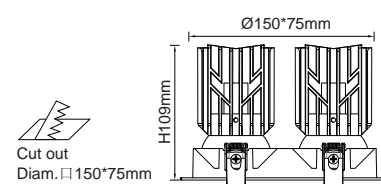

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	2*15W	100LM/LM	□150*75mm	□90*169*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90




Accessories



SOLITE
SOFTENING
LENS


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.7KG
Test seal	<div> <div>ERC</div> <div>CE</div> <div>IP20</div> <div></div> <div></div> <div></div> <div>TM-21 100,000</div> </div>

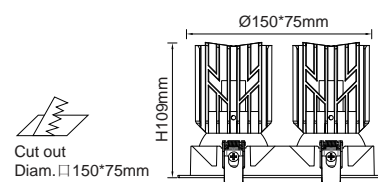

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	2*20W	100LM/LM	150*75mm	90*169*109mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE








36°-3000K-CRI90




Accessories



SOLITE
SOFTENING
LENS


Product series	DUBEE
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx.0.9KG
Test seal	      

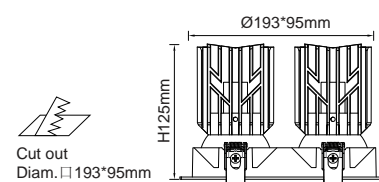

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMD519	2*24W	100LM/LM	□193*95mm	□115*215*125mm	15°/24°/36°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

36°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS