



## TANK-EX

The new IP65 waterproof downlight series features efficient heat dissipation and various cutout sizes ranging from 75mm to 200mm to meet different needs. Its recessed structure ensures comprehensive anti-glare performance. The series offers multiple optical lenses with beam angles of 15°, 24°, 38°, and 55°.




**FLEXIBLE INSTALLATION**  
with 3 different size of the cutting hole 55mm、75mm、90mm.



**LOW UGR**  
widely choice of beam angle with low UGR




**RA**  
High CRI up to 90



# RECESSED IP65 SPOT LIGHT

GAMMA


Product series	TANK-EX
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.23KG
Test seal	<div> <div>EMC</div> <div>CE</div> <div>IP65</div> <div></div> <div></div> <div>RoHS</div> <div>TM-21 100,000</div> </div>

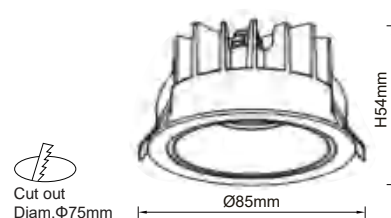


## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT056	12W	80LM/W	75mm	85*H54mm	15°/24°/ 45°/55° /70 °	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


45°-3000K-CRI90



70°-3000K-CRI90

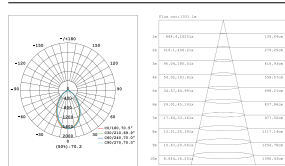


Product series	TANK-EX
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.23KG
Test seal	<div> <div>ERL</div> <div>CE</div> <div>IP65</div> <div></div> <div></div> <div></div> <div>TM-21 100,000</div> </div>

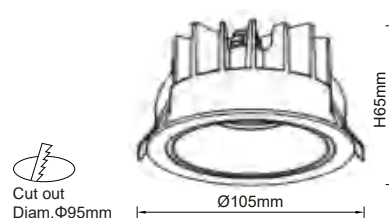


## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT056	18W	80LM/W	95mm	105*H65mm	15°/24°/ 36°/45° /70°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


### 45°-3000K-CRI90



### 70°-3000K-CRI90




Product series	TANK-EX
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6KG
Test seal	<div> <div>ERL</div> <div>CE</div> <div>IP 65</div> <div></div> <div></div> <div>SDCM &lt;3</div> <div>TM-21 100,000</div> </div>

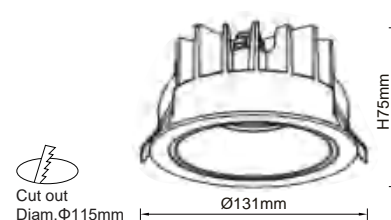

## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT056	25W	80LM/W	115mm	131*H75mm	15°/24°/ 36°/45° /70°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

45°-3000K-CRI90

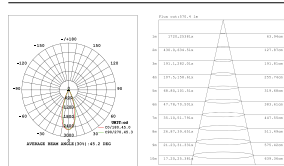

70°-3000K-CRI90

