
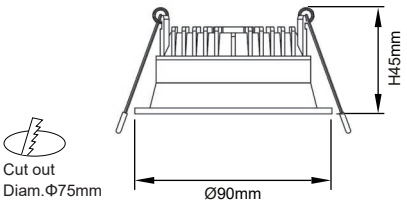



Product series	FIXED DOWN LIGHT
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.9KG
Test seal	












## Code composition/ Composizione del codice

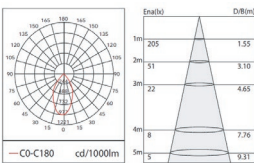Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055	7W	65LM/W	Ø75mm	Ø90*H45mm	90°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

90°-3000K-CRI90




Product series	FIXED DOWN LIGHT
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.26KG
Test seal	      

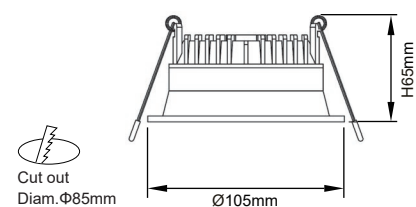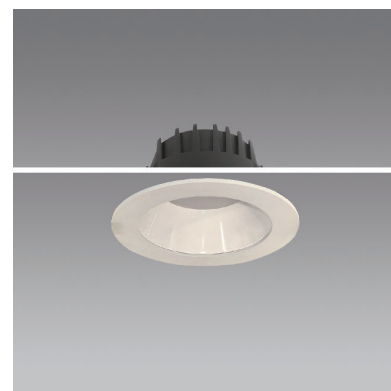


## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055	10W	80LM/W	Ø85mm	Ø105*H65mm	90°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

90°-3000K-CRI90

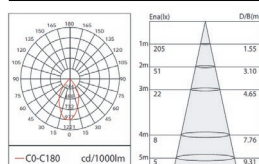


Product series	FIXED DOWN LIGHT
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.3KG
Test seal	<div><div>ENEC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

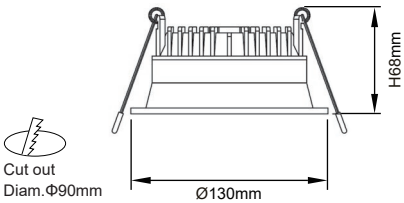





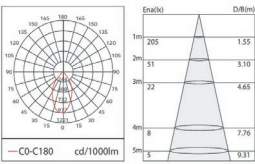



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055	15W	80LM/W	Ø90mm	Ø130*H68mm	90°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

90°-3000K-CRI90




Product series	FIXED DOWN LIGHT
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.45KG
Test seal	      

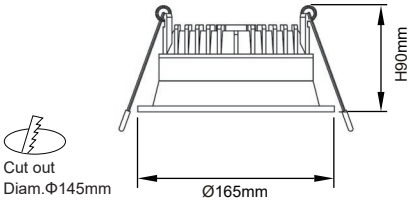



## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055	20W	80LM/W	Ø145mm	Ø165*H90mm	90°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

90°-3000K-CRI90

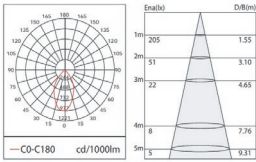

Product series	FIXED DOWN LIGHT
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.52KG
Test seal	<div> <div>ENEC</div> <div>CE</div> <div>IP20</div> <div> </div> <div> </div> <div> </div> <div> </div> </div>

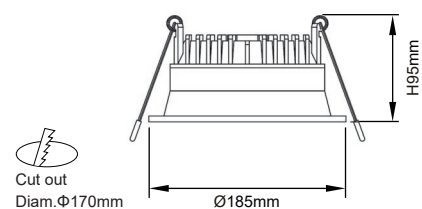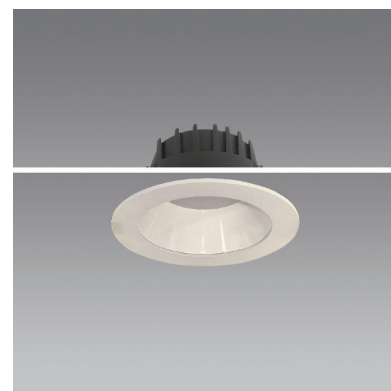

## Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMT055	30W	80LM/W	$\Phi$ 170mm	$\Phi$ 185*H95mm	110D	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

90°-3000K-CRI90

