



TANK

This Downlight boasts efficient heat dissipation and a durable aluminum shell, preventing glare for comfortable indoor illumination with high brightness. Its multi-angle optical lens ensures precise lighting, while easy installation on different ceilings and energy-saving LED technology enhance aesthetics and reduce electricity costs and environmental impact.



DESIGN

High performance in a discreet, small aperture recessed linear fixture.





INSTALLATION


Easy to install, pendent or recessed mounting.




RELIABLE

Branded component ensure the lighting have reliable quality.



Product series	TANK
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.20kg
Test seal	



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	
GMD055	5-7W	75LM/W	55mm	63*H52mm	15°/24°/45°/55°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

45°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	TANK
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On Request
Weight	Approx. 0.23kg
Test seal	

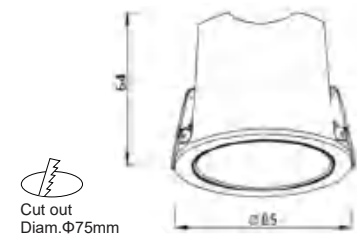

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	
GMD055	8-10W	75LM/W	75mm	85*H64mm	15°/24°/45°/55°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

45°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	TANK
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.3kg
Test seal	

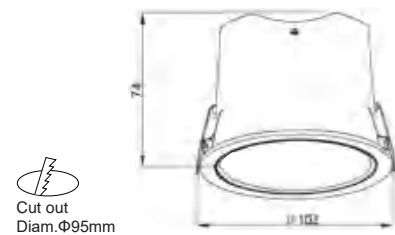

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	
GMD055	15-18W	75LM/W	95mm	102*H74mm	15°/24°/45°/55°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

45°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB