



## PRIMA

PRIMA is a simple and practical indoor chandelier, which breaks through the new energy saving scheme and provides a healthy lighting space.





### ENERGY SAVING


The power factor reaches 0.9, which meets the standard. The system efficiency is up to 120Lm/W, and the energy saving is up to 50% compared with the traditional lamps.




### BRANDED COMPONENTS

Philips components, quality assurance

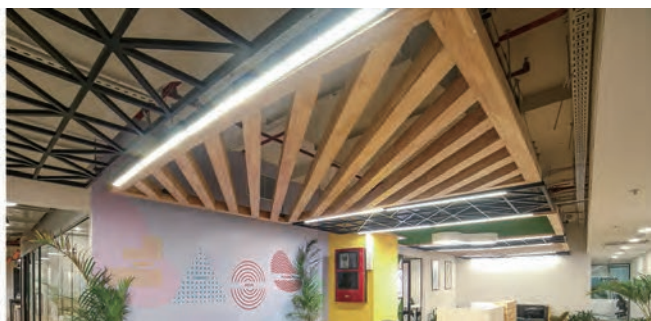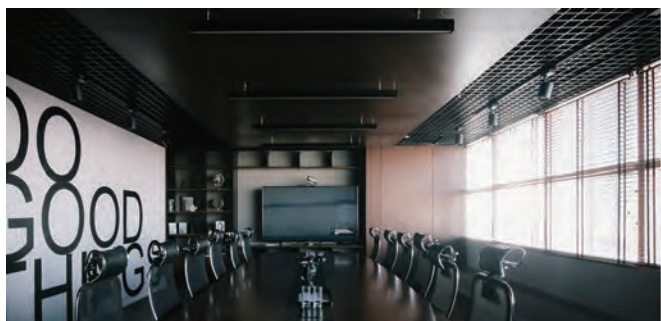


Product series	PRIMA
Application areas	Office light
Pan/tilt range	Fixed
Mounting	Pendent
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black
	RAL 9006 white aluminium
	RAL 9016 traffic white
	Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On request
Weight	Approx. 1.5KG
Test seal	




Code composition/ Composizione del codice

Model	Power	Color	Size	Beam Angle	Function
GMR010	20W	BK/WH/SL	40*H75*L1200mm	110D	ON/OFF DIM/DALI/0-10V ZIGBEE

110°-3000K-CRI90

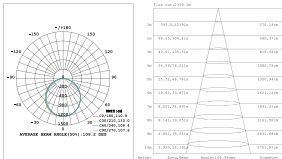


Product series	PRIMA
Application areas	Office light
Pan/tilt range	Fixed
Mounting	Pendent
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black
	RAL 9006 white aluminium
	RAL 9016 traffic white
	Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On request
Weight	Approx. 1.8KG
Test seal	<div><div>EAC</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>







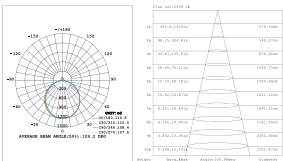



Code composition/ Composizione del codice

Model	Power	Color	Size	Beam Angle	Function
GMR010	28W	BK/WH	50*H75*L1200mm	110D	ON/OFF DIM/DALI/0-10V ZIGBEE

110°-3000K-CRI90



Product series	PRIMA
Application areas	Office light
Pan/tilt range	Fixed
Mounting	Pendent
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black
	RAL 9006 white aluminium
	RAL 9016 traffic white
	Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V,50/60Hz
Lighting controls	On request
Weight	Approx. 1.92KG
Test seal	      



Code composition/ Composizione del codice

Model	Power	Color	Size	Beam Angle	Function
GMR010	36W	BK/WH	50*H75*L1200mm	110D	ON/OFF DIM/DALI/0-10V ZIGBEE

110°-3000K-CRI90

