



## DOTAGE-XS

This ultra-slim light (5.5mm) fully recesses into the track, creating a seamless, hidden appearance. Wide-angle flood optics (120° beam) deliver uniform ambient illumination, ideal for accenting architectural details. It merges invisibility, adaptability, and performance for hotels, retail, and minimalist interiors.



### STRUCTURE

Machined aluminum tube offered with textured black, white finish. Dotage-xs can be specified with 2 baffle finishes: white or black.



### OPTIC

Designed with narrow or medium beam angle, to meet all applications. Optical choice of clear, frosted or honeycomb lenses available.




### RA

High CRI up to 97




### Reliable

Branded component ensure the lighting have reliable quality.



Product series	DOTAGE-XS
Application areas	Accent lighting
Mounting	Power Track
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K,3000K 3500K, 4000K,5000K
Cooling	Passive
Supply unit	Driver Intergrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC24V
Lighting controls	On Request
Weight	Approx.0.2kg
Test seal	<div><div>ERL</div><div>CE</div><div>IP20</div><div></div><div></div><div></div><div>TM-21 100,000</div></div>

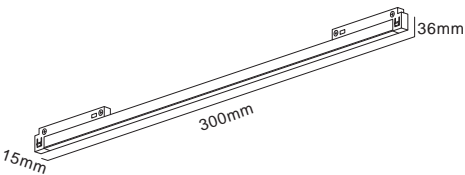

Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	Function
GMT301-S	9W	80LM/W	L300xW15xH36	120°	90	ON/OFF DIM/DALI/0-10V ZIGBEE

120°-3000K-CRI90

