



MATRIX

MATRIX is flexible with different combination such as 1, 2, 5, 10, 15 meet different space application for general lighting or accent lighting.



FLEXIBLE

Three different installation combination, trim, trimless or surface mounted .



BEAM ANGLE

Widely choice of the beam angle



RA



High CRI up to 97











RELIABLE

Branded component ensure the lighting have reliable quality.

The light transmission is three-dimensional and uniform, and the light shadow contour is more beauty.




Product series	MATRIX
Application areas	Accent Lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.1kg
Test seal	     

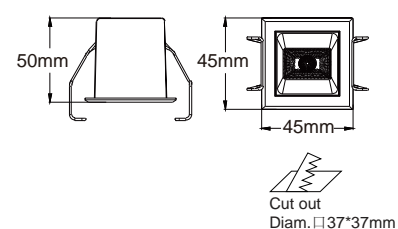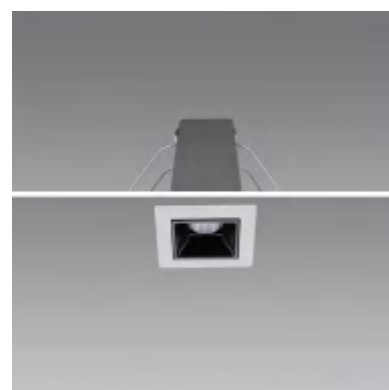


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC611	2W	50LM/W	□ 37*37mm	□ 45*45*H50mm	15°/30°/45°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


15°-3000K-CRI90












30°-3000K-CRI90



45°-3000K-CRI90




Product series	MATRIX
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.15kg
Test seal	      

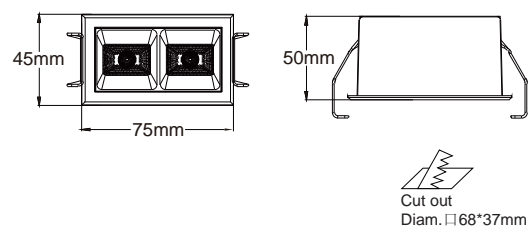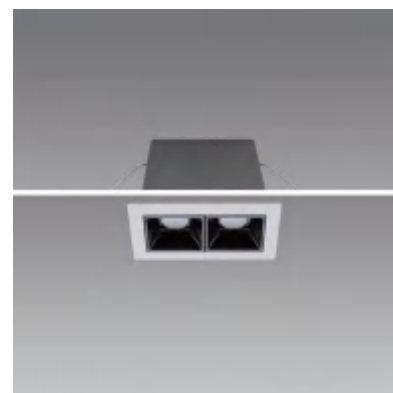


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC611	4W	50LM/W	□ 68*37mm	□ 75*45*H50mm	15°/30°/45°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


15°-3000K-CRI90









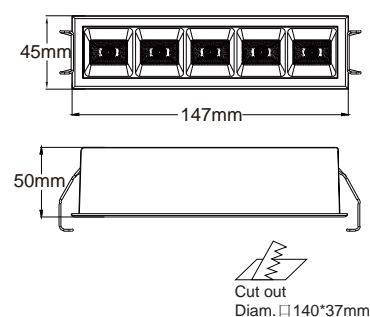
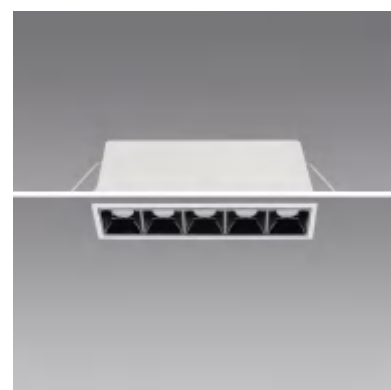
30°-3000K-CRI90



45°-3000K-CRI90




Product series	MATRIX
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.23kg
Test seal	     




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC611	10W	500LM/W	140*37mm	147*45*H50mm	15°/30°/45°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


15°-3000K-CRI90









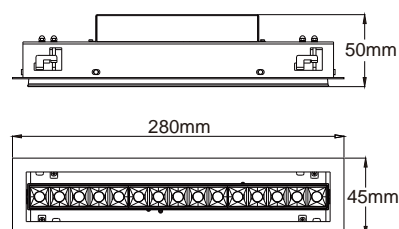
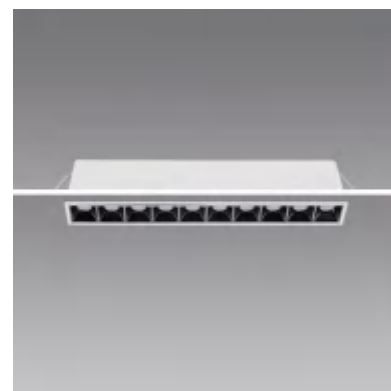
30°-3000K-CRI90




45°-3000K-CRI90



Product series	MATRIX
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.39kg
Test seal	     





 Cut out
 Diam. \square 273*37mm


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC611	20W	50LM/W	\square 273*37mm	\square 280*45*H50mm	15°/30°/45°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE


15°-3000K-CRI90










30°-3000K-CRI90



45°-3000K-CRI90




Product series	MATRIX
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LW/W
Light colour White	2700K, 3000K, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.5kg
Test seal	     

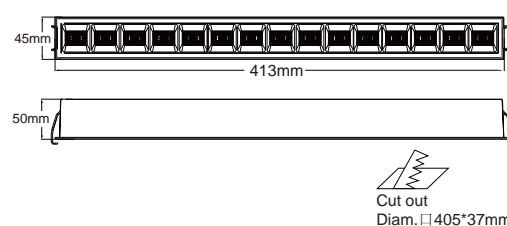


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC611	40W	50LM/W	□ 405*37mm	□ 413*45*H50mm	15°/30°/45°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

15°-3000K-CRI90



30°-3000K-CRI90



45°-3000K-CRI90

