



FORMA

Forma is a spotlight which can use as the downlight for direct lighting or pull out the lighting for spot light , no limitaion for the ceiling ,Granting a complete rotation and creating accent or wide lighting.



WIDELY ROTATION
355°turning range , 180°swiver range



FLEXIBLE INSTALLATION
with 5 different size of the cutting hole, 65mm, 75mm, 90mm,120mm ,140mm



RA
High CRI up to 97



FLEXIBLE INSTALLATION
with 2 different size of the cutting hole 75mm, 95mm.




FOOD



FASHION




SHOP



AUTOMOBILE


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.26KG
Test seal	

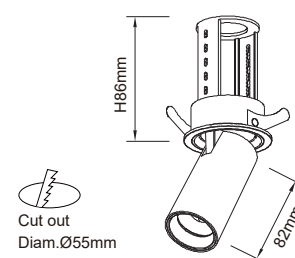


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	7W	60LM/LM	Ø55mm	Ø62*H86mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

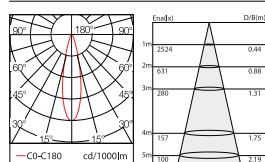

38°-3000K-CRI90

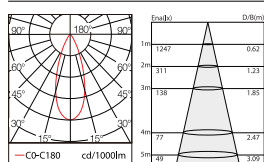

Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.61KG
Test seal	

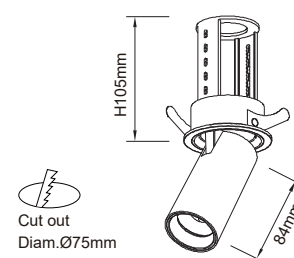


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	12W	60LM/LM	Ø75mm	Ø84*H105mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

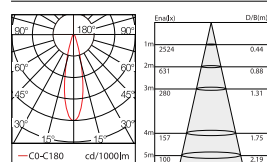


38°-3000K-CRI90

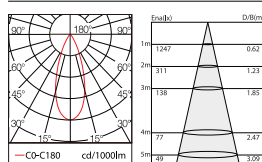








Acessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.03KG
Test seal	      

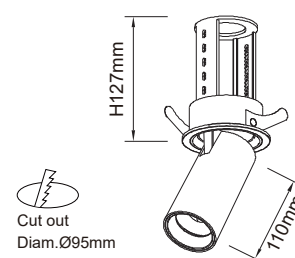


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	20W	60LM/LM	Ø95mm	Ø110*H127mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

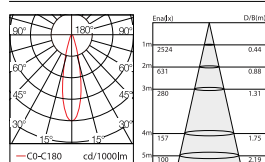


38°-3000K-CRI90

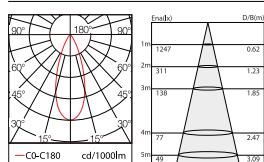








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.34KG
Test seal	      

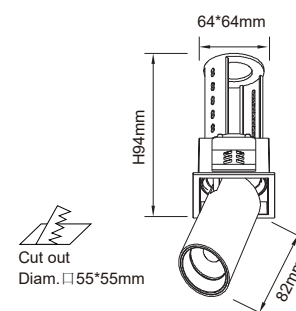


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	7W	60LM/LM	□ 55*55mm	□ 64*64*H94mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

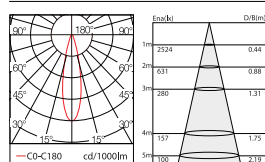


38°-3000K-CRI90

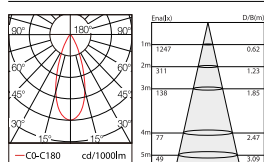








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.73KG
Test seal	      

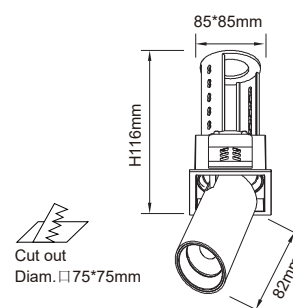


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	12W	60LM/LM	□ 75*75mm	□ 85*85*H116mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

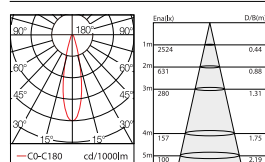


38°-3000K-CRI90

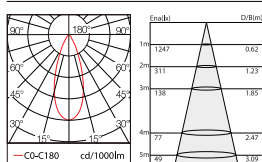








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.2KG
Test seal	      

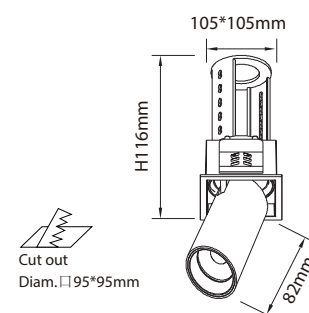


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	20W	60LM/LM	□95*95mm	□105*105*H144mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

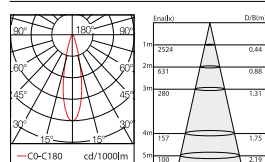


38°-3000K-CRI90

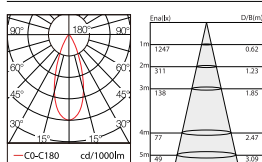








Accessories





SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.68KG
Test seal	      

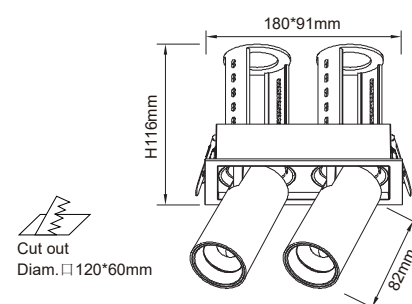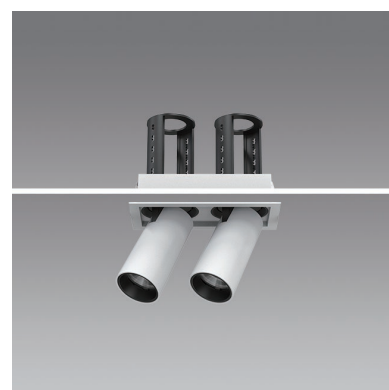


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*7W	120LM/LM	120*60mm	180*91*H116mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

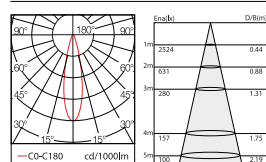


38°-3000K-CRI90

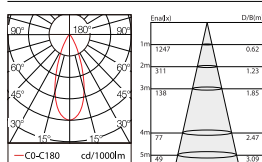








Accessories





SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.5KG
Test seal	      

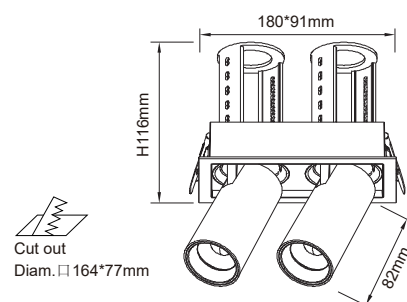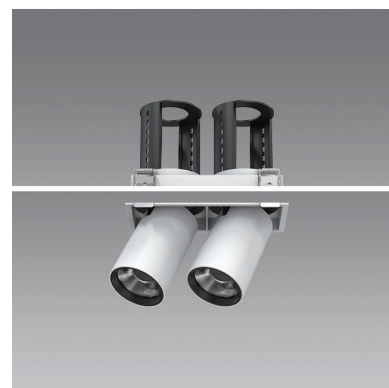


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*12W	120LM/LM	□ 164*77mm	□ 180*91*H116mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

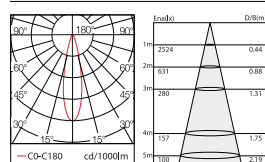


38°-3000K-CRI90

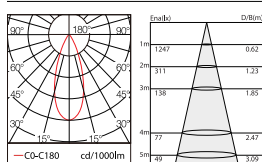








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.52KG
Test seal	      

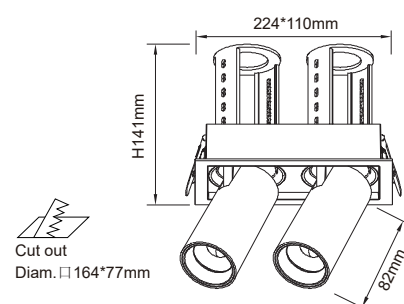


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*20W	120LM/LM	□ 164*77mm	□ 224*110*H142mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

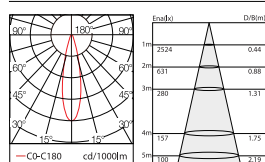


39°-3000K-CRI90

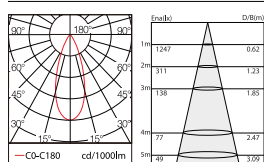








Accessories





SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.7KG
Test seal	      

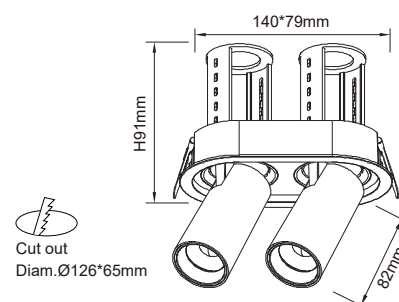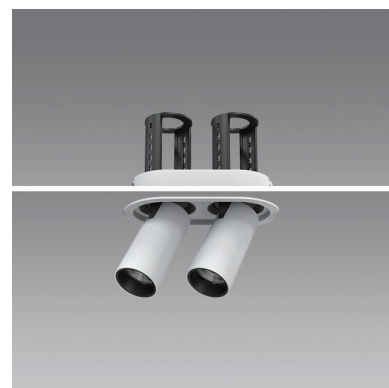


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*7W	120LM/LM	Ø126*65mm	140*79*H91mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

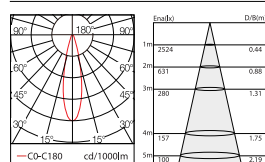


38°-3000K-CRI90

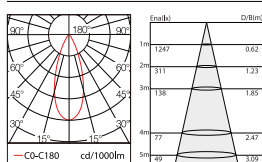








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.7KG
Test seal	      

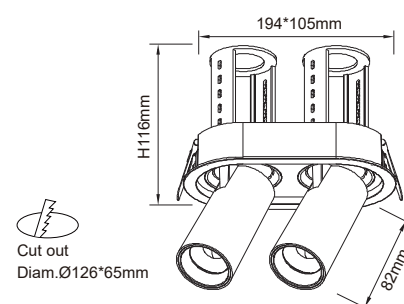


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*12W	120LM/LM	Ø126*65mm	Ø194*105*H116mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

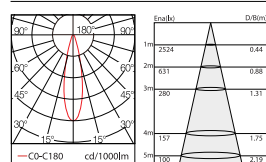


38°-3000K-CRI90

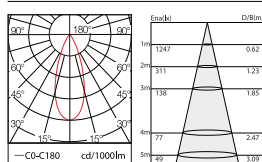








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	100-240V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 2.55KG
Test seal	      

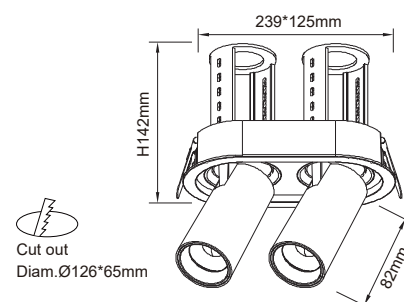


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	Size	Beam Angle	CRI	Function
GMC516	2*20W	120LM/LM	Ø223*109mm	Ø239*125*H142mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

24°-3000K-CRI90

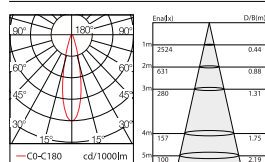


38°-3000K-CRI90

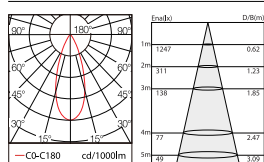

Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB